



- Dimmable 10 -350 nits
- 19" steel enclosure industrial display
- IP65 compliant front bezel
- VESA mount 75 x 75
- Anti-reflection glass in front for protection
- Default AC 100~240V input / DC 11~32V input
- Default input: VGA, DVI, RCA, and S-Video

MARINMON 19

LCD

Display Type	19" TFT LCD
Max. Resolution	1280 x 1024
Max. Color	16.7M
Contrast Ratio	1000: 1
View Angle	170 (H) / 160 (V)
Backlight Lifetime	50,000 hrs
Luminance (cd/m ²)	350 nits

Mechanical

Construction	Black Steel Front Panel Option Front Bezel : 304 S.S. / 316L S.S. / Aluminum Chassis Black Steel Back Cover
Mounting	Panel mount / VESA mount 75 x 75 / Rack Mount (Option)
IP Rating	Front side IP65
Dimensions	467 x 379 x 68 mm
Net Weight	7.6 Kg

Environmental

Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~90% @40 °C non-condensing
Certificate	CE/FCC Class A




Default inputs



DVI, VGA, CV, and YC

MARINMON 19

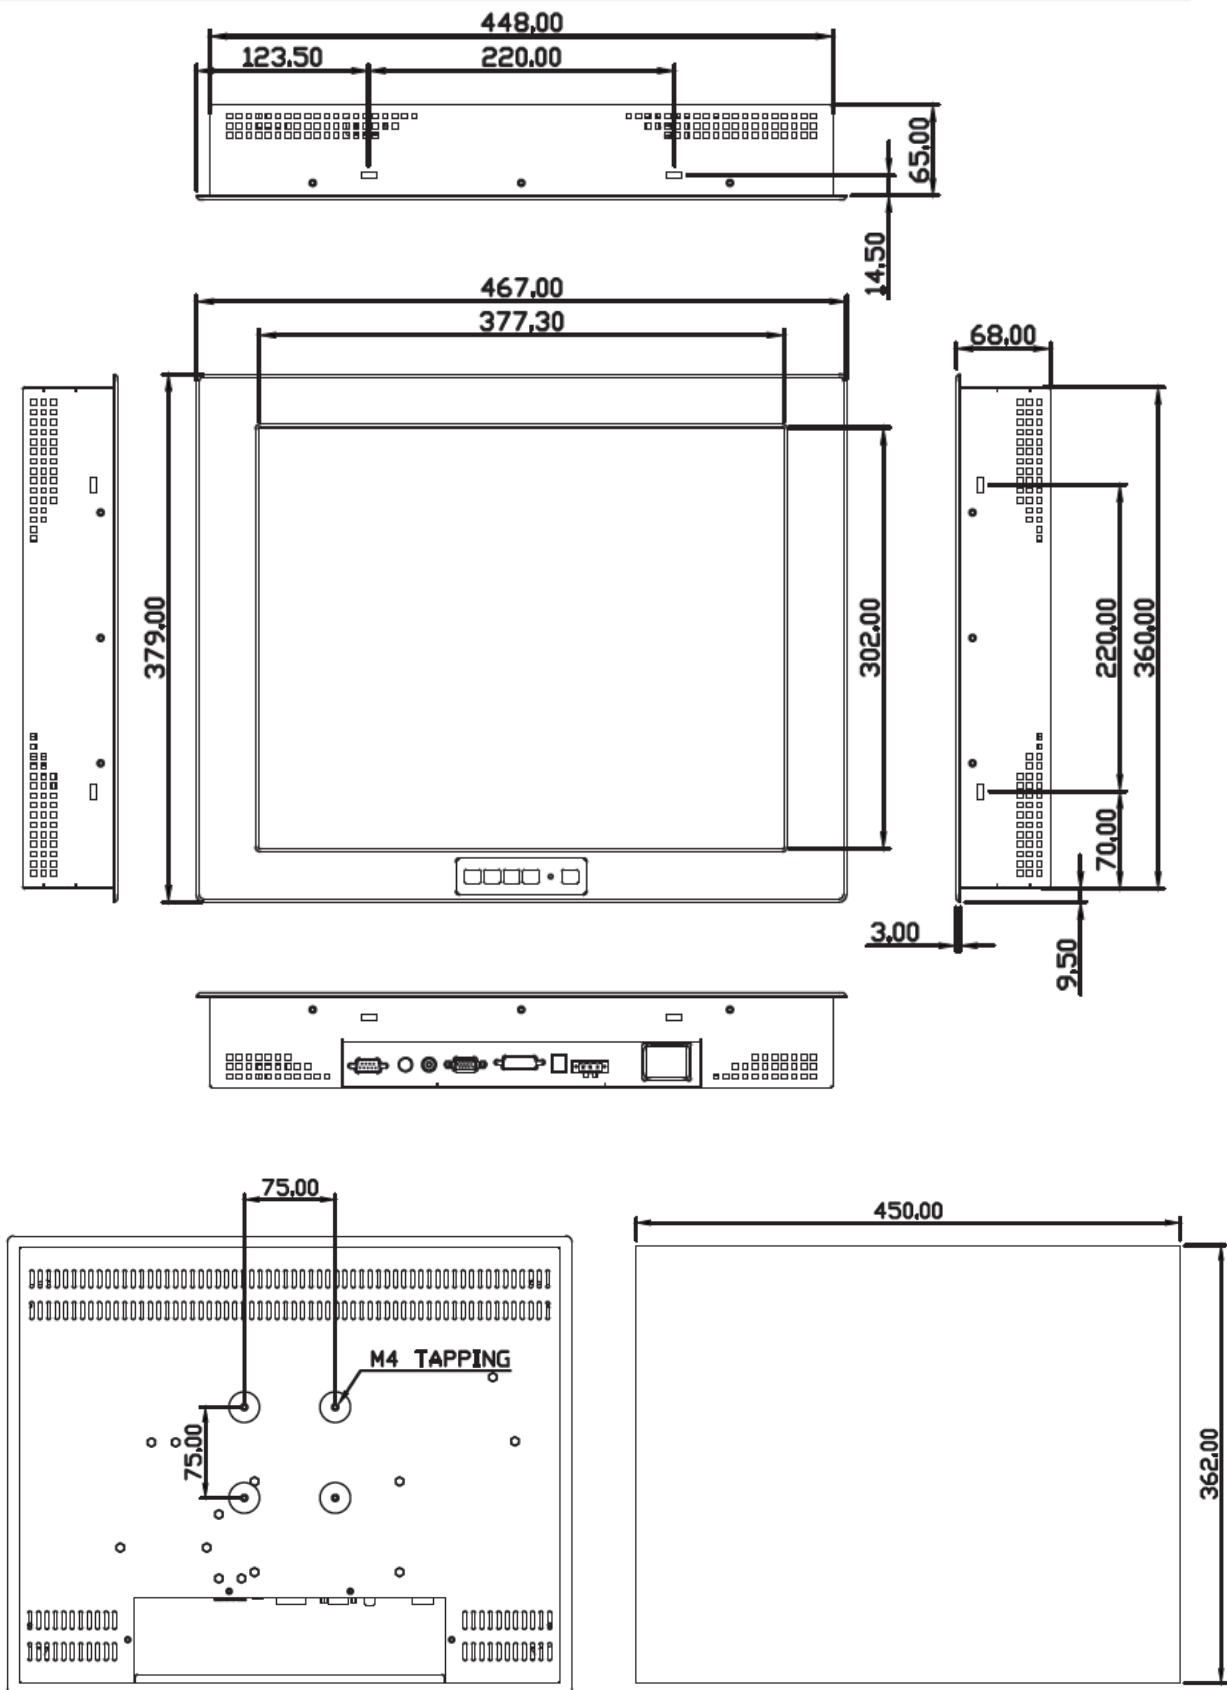

Ordering info: AC Power: ADP-1194-90

DC Power: ADP-1194-91